

MAR 126

Modular Ice Machine up to 1000 kg

Item #:
Project:
Quantity:



FEATURES

- Scale ice machine, in "compact system" version; built-in unit. Storage bin not supplied, to be purchased separately.
- AISI304 Stainless steel evaporator and ice scraper blade. Redesigned evaporator compartment end-walls.
- Foodgrade ABS plastic water sump tray, easy remove for cleaning and sanitising.
- Electromechanical control panel. Electrical protections, rotation speed & reverse phase controls.
- Low- water sensor protection. Hermetic compressor. Storage bin thermostatic ice level sensor
- Drive motor / gear reducer with V-Belt drive.
- Stainless steel panels in scotch-brite finish, with rounded corners, easy to remove for maintenance.
- ON/OFF manual switch, with weekly programmable timer.



MAR 126
Scale ice
Residual water content 2%
Thickness 1 or 2 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/60/3
380/60/3N
400/50/3N

RECOMMENDED BINS

Head	Bins		kg
	Bin Model	Weight	
MAR 126	● UBH1100	553	
	● UBH1600	812	
	● UBH2250	1068	
	● SIS700	318 + 73	
	● SIS1350	613 + 73 + 73	

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxx : need additional bin top

Certifications:



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com


Modular Ice Machine up to 1000 kg

MAR 126

Modular Ice Machine up to 1000 kg

Item #:
Project:
Quantity:

Modular Ice Machine up to 1000 kg

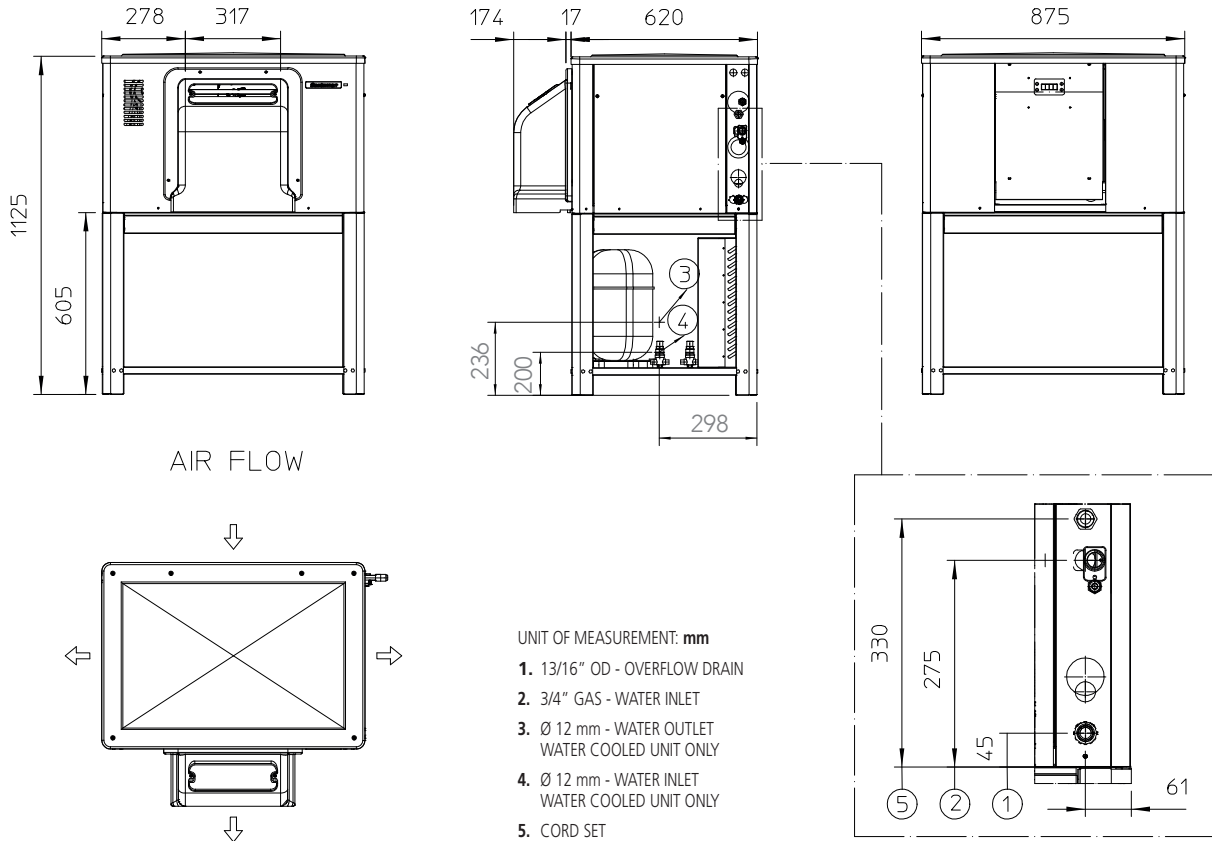

UNIT DATA			Cooling Requirements (Te -23.3°C; Tc +54.5°C)				Circuit wires		Max. fuse size			
			Version	Voltage	Btu/h	W	No.	Ømm ²	A			
Size (W x D x H)	906 x 636 x 1125 mm		MAR 126 AS	400/50/3N	18767	5500	5	2.5	16			
Net weight	211 kg		MAR 126 AS	230/60/3	18767	5500	4	2.5	16			
SHIPPING DATA			MAR 126 AS	380/60/3N	18767	5500	5	2.5	16			
			MAR 126 WS	400/50/3N	18767	5500	5	2.5	16			
Carton (W x D x H)	980 x 740 x 1230 mm											
Weight	228 kg											
			24 h ice production kg °C Amb. / °C Water						Energy consumption (*)		Water usage(*)	Instant power
Version	Condensation	Voltage	10°C/10°C		21°C/10°C		32°C/21°C		kWh/100 kg	kWh/24h	l/h	W
			1 mm	2 mm	1 mm	2 mm	1 mm	2 mm				
MAR 126 AS	Air	400/50/3N	1000	900	1000	900	780	702	12.8	100.0	32.5	4500
MAR 126 AS	Air	230/60/3	1000	900	1000	900	780	702	12.8	100.0	32.5	9000
MAR 126 AS	Air	380/60/3N	1000	900	1000	900	780	702	12.8	100.0	32.5	4500
MAR 126 WS	Water	400/50/3N	1000	900	1000	900	780	702	12.8	100.0	333.3	4500

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions